

LADIES SAFETY RANGE



FUEL

Ultra-lightweight highly slip resistant slip-on double gusset safety boot for female workers exposed to slippery environments and work in light industrial environments. The FUEL is ideal for women working in the food processing, hospitality, cleaning and light industrial sectors.



SIZES
6-12
1/2 SIZES 6.5-9.5
HEIGHT
145^{mm}
5⁹"
WEIGHT
503^g

COLOURS



PERFORMANCE SYSTEMS

SYST-M®

Integrated series of technologies and design features to provide movement specific support and flexibility.

asymBEVEL™

Heel shaped to match the natural heel strike position during walking to maximise contact area and provide a smooth ride.

Hydrodynamic™

Sole shape and tread pattern engineered to optimise fluid dispersion beneath the foot to minimise slips.

decoupleGROOVE™

Flex groove along the length of the sole to provide flexibility to allow a smooth transition from initial contact to foot flat and improve terrain adaption.

WIDEcap

Wide anatomical shaped toecap to reduce rubbing and nerve impingement.

SAFETY SYSTEMS

COMPOSITE Toecap

Lightweight, metal-free, nonconductive, insulating and airport friendly safety toecap that complies with (AS/NZS 2210.3), (EN-ISO 20345) and (ASTM F2413-11) standards.

slipRESIST-C

Sole slip resistant to soap (SLS) on ceramic tiles and glyceryl on steel plate.

fueloilRESIST

Sole resists breakdown to fuel oil.

ANTI-STATIC

Minimises static electricity build up for safety in volatile environments.

H₂O RESISTANT

Footwear designed to shed water.

LOWcatchsole

Low profile sole at the toe to reduce the risk of tripping.

HAZARD SOLUTION GUIDE

SLIPS

- asymBEVEL™ to match the natural heel strike position during walking to maximise ground contact area during initial contact.
- Hydrodynamic™ sole shape and tread pattern engineered to optimise fluid dispersion beneath the foot to minimise slips.

TRIPS & FALLS

- Lightweight design to reduce fatigue of the leg muscles that lift the toes.
- LOWcatchsole to improve swing phase ground clearance at the toe to reduce the risk of tripping.
- asymBEVEL™ to match the natural heel strike position during walking to minimise fatigue of the leg muscles that lift the toes.

PRODUCT DETAILS

APPROVED STANDARDS

- AS/NZS 2210.3 (Class I S2 SRC)
- EN – ISO 20345 (Class I S2 SRC)
- ASTM F2413-11 (F/I/75/C/75/SD)

OUTSOLE: Rubber

TOECAP: Composite

UPPER: Full Grain Leather


PRODUCT CODES:

xxx represents sizing i.e. size 12 is 120 and size 9.5 is 095


BLACK/PINK BOOT CODE:
MKFUEL-BKFxxx



FIT GRID

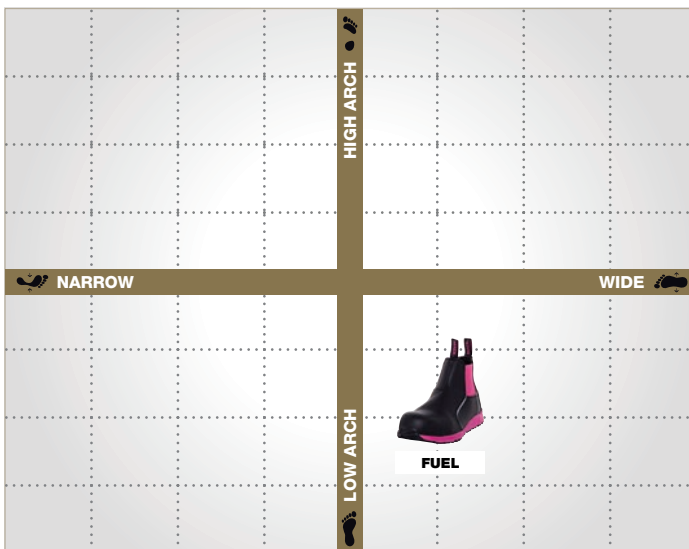

SOLE SELECTION GRID

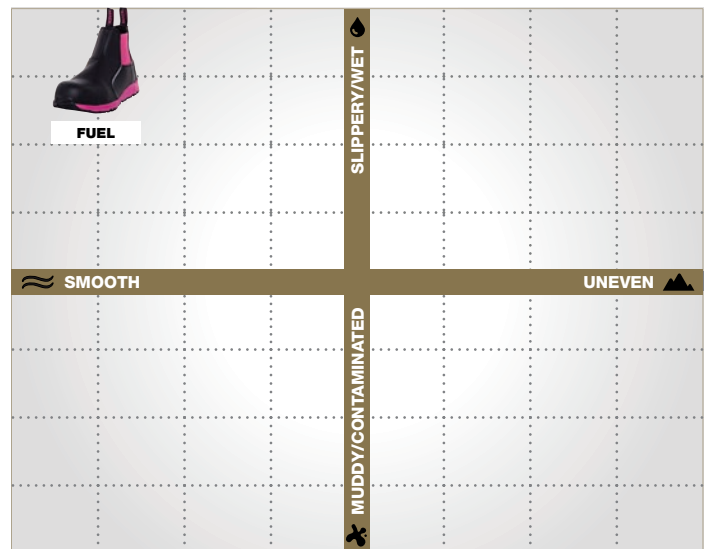

MACKBOOTS.COM.AU | 1300 350 216

Mack Footwear is sold under licence from Mack Trucks, Inc. All rights reserved. *Weight disclaimer. Footwear weights are based on a men's UK8 for a single shoe or boot and a ladies UK10 for women's shoes. Due to the nature of manufacturing there will be subtle variation between pairs. Disclaimer: Every reasonable effort has been made to ensure the accuracy of the Product information in this document. This document must not be regarded as an infallible guide. Mack Boots™ accepts no responsibility in this regard. As product details may change from time to time please contact Mack Boots™ to gain the latest information.



AS/NZS 2210 Australian /New Zealand Standards
EN - ISO 20345 European Standards
ASTM F2413 American Standards